

UGA穿管戈兰

戈兰类型


- 弹性胶圈密封

适配电缆

- 非铠装电缆

认证

- GB: Exd IIC Gb, Ex e IIC Gb, Ex tD A21 IP66
- IECEx: Exd IIC Gb, Ex e IIC Gb, Ex tD IIIC Db, IP66

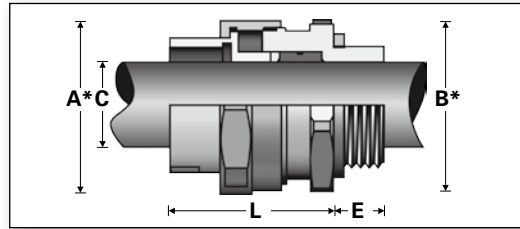

产品特性:

- 黄铜镀镍材质拥有更强的耐腐蚀性能
- 可在电缆外层提供防爆及防水防尘保护
- 外螺纹端接入箱体，内螺纹端可连接软管或钢管
- 密封圈材质为EPDM橡胶，使用温度范围-40°C~125°C

订货信息

UGA	075NPT	L	100G	B
戈兰系列	螺纹尺寸(外)	电缆范围	螺纹尺寸(内)	材料
UGA	20=M20x1.5 25=M20x1.5 32=M32x1.5 40=M40x1.5 50=M50x1.5 63=M63x1.5 75=M75x1.5 050G=M20x1.5 075G=M20x1.5 100G=M20x1.5 125G=M20x1.5	L=大号 S=小号	20=M20x1.5 25=M20x1.5 32=M20x1.5 40=M20x1.5 50=M20x1.5 60=M20x1.5 050G=1/2"G 075G=3/4"G 100G=1"G 125G=1 1/4"G 150G=1 1/2"G 200G=2"G 250G=2 1/2"G	B=黄铜镀镍 S=SS 304 T=SS 316

戈兰尺寸	螺纹外径 "C" (mm)	螺母尺寸		戈兰长度 "L" (mm)	外螺纹尺寸	内螺纹尺寸						螺纹长度 "E" (mm) ISO(NPT)
		A*	B*			ISO	代码**	NPT	代码**	G	代码**	
5	8-11	30	30	39-47.5	M20 G1/2"	M20	UGA/20/S/20 UGA/20/S/050G	1/2"	UGA/050NPT/S/20 UGA/050NPT/S/050G	1/2"	UGA/050G/S/20 UGA/050G/S/050G	17
6	11-14	30	30	39-47.5	M20 G1/2"							
6	12-15	40	41	40-50	M25 G3/4"	M25	UGA/25/S/25 UGA/25/S/075G	3/4"	UGA/075NPT/S/25 UGA/075NPT/S/075G	3/4"	UGA/075G/S/25 UGA/075G/S/075G	17
7	14-19	40	41	40-50	M25 G3/4"							
7	14-17	47	43	45-56.5	M32 G1"	M32	UGA/32/S/32 UGA/32/S/100G	1"	UGA/100NPT/S/32 UGA/100NPT/S/100G	1"	UGA/100G/S/32 UGA/100G/S/100G	17(20)
8	19-24	47	43	45-56.5	M32 G1"							
8	17-23	57	53	47-58	M40 G1 1/4"	M40	UGA/40/S/40 UGA/40/S/125G	1 1/4"	UGA/125NPT/S/40 UGA/125NPT/S/125G	1 1/4"	UGA/125G/S/40 UGA/125G/S/125G	17(20)
9	22-28	57	53	47-58	M40 G1 1/4"							
9	22-27	63	59	47-58.6	M50 G1 1/2"	M50	UGA/50/S/50 UGA/50/S/150G	1 1/2"	UGA/150NPT/S/50 UGA/150NPT/S/150G	1 1/2"	UGA/150G/S/50 UGA/150G/S/150G	17(20)
10	27-34	63	59	47-58.6	M50 G1 1/2"							
10	27-34	78	71	59-83	M60 G2"	M63	UGA/63/S/60 UGA/63/S/200G	2"	UGA/200NPT/S/60 UGA/200NPT/S/200G	2"	UGA/200G/S/60 UGA/200G/S/200G	17(20)
11	37-48	78	71	59-83	M60 G2"							
11	34-41	91	87	61-85	G2 1/2"	M75	UGA/75/S/250G UGA/75/L/250G	2 1/2"	UGA/250NPT/S/250G UGA/250NPT/L/250G	2 1/2"	UGA/250G/S/250G UGA/250G/L/250G	17(25)
12	46-56	91	87	61-85	G2 1/2"							

* A、B螺母平行边距离，螺母对角边距离为A×1.1，B×1.1