

ADE 4a

戈兰类型


- 弹性胶圈密封

适配电缆

- 铠装电缆

产品认证

- IP66

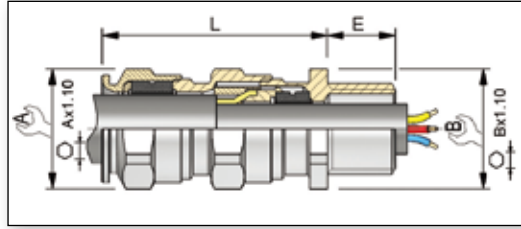

产品特性:

- 标配的黄铜镀镍材质拥有更强的耐腐蚀性能
 - 氯丁橡胶密封圈适用于-40°C~100°C的环境
- 注意: 电缆悬空超过300mm时, 建议使用夹紧模块

示例	
CAP84669 4A	
戈兰型号	可选项

可选项(必选)
4A 黄铜镀镍

戈兰尺寸	螺纹尺寸		螺纹长度 'E' (mm)	电缆内层 外径范围 (mm)	电缆外层 外径范围 (mm)	最大铠装层 厚度 (mm)	戈兰长度 'L' (mm)	螺母尺寸 (mm)	
	ISO	代码						A*	B*
5	16	CAP846594A	15	4-8.5	6-12	0.9	36	19	19
6		CAP846504A	15	6-12	8.5-16	1.25	42	24	24
5	20	CAP846674A	15	4-8.5	6-12	0.9	36	19	24
6		CAP846694A	15	6-12	8.5-16	1.25	42	24	24
7		CAP846604A	15	8.5-16	12-21	1.25	46	30	30
6	25	CAP846774A	15	6-12	8.5-16	1.25	42	19	30
7		CAP846794A	15	8.5-16	12-21	1.25	46	24	30
8		CAP846704A	15	12-20.5	16-27.5	1.6	56	30	41
8	32	CAP846894A	15	12-21	16-27.5	1.6	56	41	41
9		CAP846804A	15	16-27.5	21-34	1.6	63	41	48
9	40	CAP846994A	15	16-27.5	21-34	1.6	63	48	48
10		CAP846904A	15	21-34	27-41	2	68	48	55
10	50	CAP846094A	16	21-34	27-41	2	68	55	55
11		CAP846004A	16	27-41	33-48	2.5	74	55	64
12	63	CAP846294A	17	27-41	33-48	2.5	77	64	72
13		CAP846204A	17	33-48	40-56	2.5	85	72	85

* A、B为螺母平行边距离, 螺母对角边距离为Ax1.1及Bx1.1;

** 不锈钢产品在紧固操作时, 请涂润滑油以防螺纹咬死。润滑油信息请参考附件页。