

NEWCAP MS-e

Product Introduction

Type of Cable Gland


- With elastomeric seal

Cable type

- Non-armoured cable
- Braided cable

Certifications and Compliances

- ATEX II 2 GD – Exe II/ExtD
- IECEx – Exe II/ExtD
- EN 50262

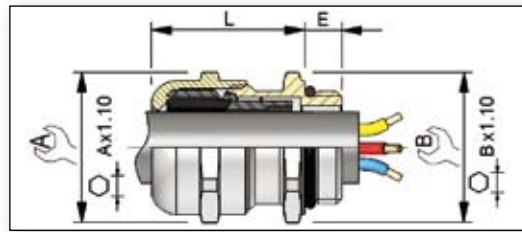

Features:

- Material: Nickel-plated brass.
- Neoprene sealing ring and dust cover.
- Polyamide clamping bush.
- Operating temperature range: -20°C to +80°C.
- Integrated O-ring on fixing thread.

Gland Size	Entry Thread Size		Thread Length 'E' (mm) ISO/ NPT	Braid thickness (mm)	Cable Diameter (mm)	Gland Length 'L' (mm)	Hexagon Dimension (mm)		Long Fixing Thread (E is 15mm, Stainless steel 316L) Code
	ISO	Code					A*	B*	
4	12	CAP192124V1	6.5	0.7	4-6.5	18	15	15	CAP192129V1
4	16	CAP192154V1	6.5	0.7	4-6.5	18	15	18	CAP192159V1
5		CAP192164V1	6.5	0.7	5.5-10	24	20	20	CAP192169V1
5	20	CAP192194V1	6.5	0.7	5.5-10	24	20	22	CAP192199V1
6		CAP192204V1	6.5	0.8	7.5-13	27	24	24	CAP192209V1
6	25	CAP192244V1	7	0.8	7.5-13	27	24	27	CAP192249V1
7		CAP192254V1	7	0.85	11.5-18	28	30	30	CAP192259V1
7	32	CAP192314V1	8	0.85	11.5-18	28	30	34	CAP192319V1
8		CAP192324V1	8	0.95	17.5-24.5	30	38	38	CAP192329V1
8	40	CAP192394V1	8	0.95	17.5-24.5	30	38	43	CAP192399V1
9		CAP192404V1	8	1	24-32	33	47	47	CAP192409V1
9	50	CAP192494V1	9	1	24-32	33	47	54	CAP192499V1
10		CAP192504V1	9	1.15	31-40.5	37	57	57	CAP192509V1
10	63	CAP192624V1	10	1.15	31-40.5	37	57	68	CAP192629V1
11		CAP192634V1	10	1.75	39-53	48	75	75	CAP192639V1

* A, B is the parallel-edge distance of Hexagon, and the diagonal-edge distance is Ax1.1, Bx1.1.