

## LED Emergency and Exit Luminaires

### Light-Pak™ N2LPS Emergency Lighting PRIMARY APPLICATIONS

Used to provide reliable illumination for egress areas during failure or interruption of power to the normal lighting system.

### LUMINAIRE MODEL

Model Number	Battery Life
N2LPS	3 hours

### CERTIFICATIONS & COMPLIANCES

- Class I, Division 2, Groups B, C, D
- Class I, Zone 2
- UL844; UL924; UL1598A
- C22.2 No. 141-M1985; C22.2 No. 137-M1981
- Life Safety Code NFPA101® - Section 5-9
- Type 4X

### ELECTRICAL RATINGS

- Power Supply Input: 120, 220, 230, 240, 277 sVAC; 28W max.

### LED Exit Signs

#### PRIMARY APPLICATIONS

Used for marking escape routes and exits in potentially explosive atmospheres.

### LUMINAIRE MODELS

Model Number	Rating	Battery
Ex-Lite Z	Hazardous	No
Ex-Lite ZE	Hazardous	Yes
CCH UX	Industrial/Hazardous	Optional

### CERTIFICATIONS & COMPLIANCES

#### Ex-Lite:


- Class I, Division 2, Groups A, B, C, D
- Class I, Zone 1, AEx em ib IIC (NEC)
- Class I, Zone 1, Ex em ib IIC (CEC)
- Class II, Division 2, Groups F, G (NEC)
- Class II, Division 2, Groups E, F, G (CEC)
- IP66
- UL844; UL924/CSA22.2 No. 141-02; UL60079CSA22.2 E60079; UL1203/CSA22.2 E6124-1-1-02

#### CCH UX:

- NEMA 4X; UL50
- UL924 Wet Location
- IP65; IP66
- Class I, Division 2, Groups A, B, C, D

### ELECTRICAL RATINGS

- Voltages: 120-277 VAC, 110-250 VDC (Ex-Lite only)
- Power Consumption: 6VA

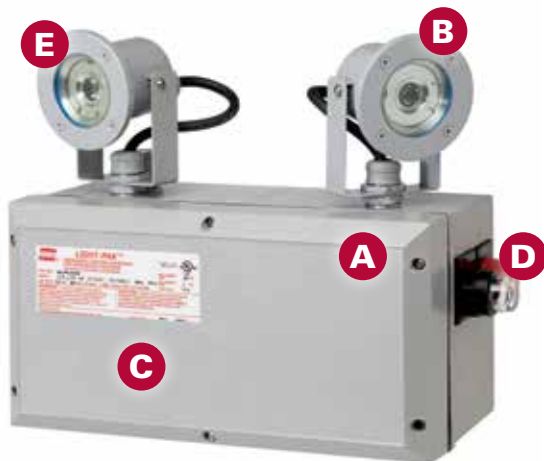

LED egress, emergency and exit lighting designed for harsh and hazardous locations



### N2LPS DESIGN FEATURES

- A Non-metallic, enclosed, gasketed housing** - Provides corrosion protection in the most extreme environments.
- B Durable and marine rated LED lamp head assemblies** - Provide protection against water ingress, corrosion and impact.
- C Nickel cadmium battery** - High temperature rated nickel cadmium battery for reliable operation up to 55°C ambient.
- D Reduced maintenance costs** - Self-test, monitoring and diagnostics reduce costly maintenance checks.
- E Remote mountable lamp heads** - Lamp heads can be mounted independently from the enclosure, allowing you to focus light where you need it.

### Exit Lighting DESIGN FEATURES

- F Corrosion- and impact-resistant housing** - Ensures long product life and reliability.
- G Nickel cadmium battery** - Premium heavy duty nickel cadmium battery with 24-hour charge and recharge time increases safety by recovering quickly from an outage.
- H "EXIT" legend with alternative directional arrows** - Left, right or left and right; simple field modification (Ex-Lite only).



Emergency & exit lighting



Exit lighting only